

Key Design Features

- Synthesizable, technology independent VHDL Core
- Combined functions $y = \sin(x)$, $y = \cos(x)$
- Input range $-\pi \leq x \leq \pi$
- Output range $-1 \leq y \leq 1$
- Based on a quadratic polynomial with dynamic coefficients
- Input values as 18-bit signed fractions in radians
- Output values as 17-bit signed fractions
- Accurate to within 0.00017
- High-speed fully pipelined architecture
- Tiny implementation
- 5 clock-cycle latency

Applications

- Fixed-point mathematics
- Quadrature signal generation in digital communications
- Cheaper alternative to using a 65k x 16-bit LUT (128kbytes)
- Cheaper alternative to CORDIC

Pin-out Description

Pin name	I/O	Description	Active state
clk	in	Synchronous clock	rising edge
en	in	Clock enable	high
x_in [17:0]	in	Input value in radians	data
sin_out [16:0]	out	Output value	data
cos_out [16:0]	out	Output value	data

Functional Specification

Value	Type	Valid range
x_in [17:0]	18-bit signed fraction in [18 15] format	$[-\pi, \pi]$
sin_out [16:0]	17-bit signed fraction in [17 15] format	$[-1, 1]$ Accuracy to within 0.0002
cos_out [16:0]	17-bit signed fraction in [17 15] format	$[0, 1]$ Accuracy to within 0.0002

Block Diagram

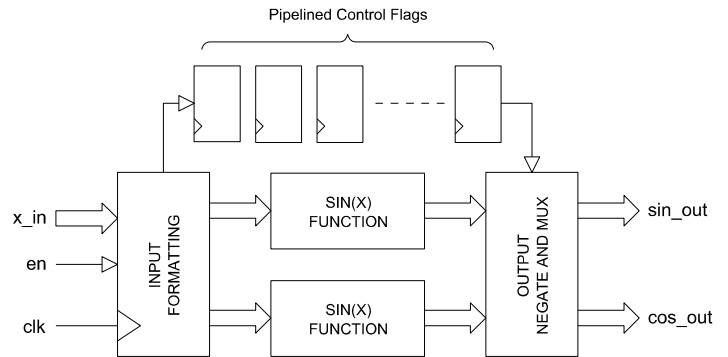


Figure 1: SINCOS_X function Architecture

General Description

SINCOS_X (Figure 1) calculates the sine and cosine of an angle in radians. It has a fully pipelined architecture and uses fixed-point mathematics throughout. Input values are accepted as 18-bit signed values in the range $-\pi$ to π . Output values are 17-bit signed values in the range -1 to 1 . For input values outside the specified range, *sin_out* defaults to 0 and *cos_out* defaults to -1 .

Input and output values are specified in [18 15] format with 1 sign bit, 2 integer bits and 15 fraction bits. Output values are in [17 15] format with 1 sign bit, 1 integer bit and 15 fraction bits. Internally, the function uses a quarter-wave SIN function core implemented as a 2nd order polynomial with dynamic coefficients. Values are sampled on the rising clock-edge of *clk* when *en* is high. The function has a 5 clock-cycle latency.

Functional Timing

Figure 2 demonstrates the computation of $y = \sin(x)$ and $y = \cos(x)$ where x is respectively 0x04872 and 0x30066 (0.56598 and -1.99689 as a decimal fraction). The results for the SIN calculation are 0x044A4 and 0x18B72 (0.53625 and -0.91058 in decimal). For the COS calculation the results are 0x06C09 and 0x1CB1B (0.84402 and -0.41324 in decimal).

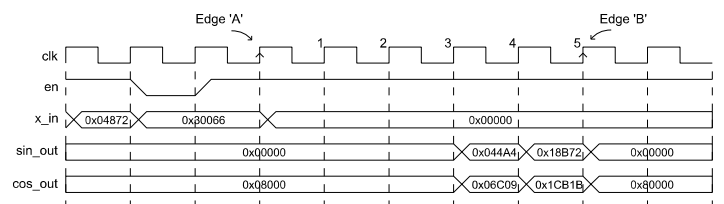


Figure 2: Timing waveform for the sincos function

Note that the second value of x is stalled by the clock-enable signal being de-asserted for one clock cycle. In the next cycle, the clock-enable is asserted high and normal operation continues. The function has a latency of 5 clock cycles as indicated by edge 'A' and 'B' in the timing waveform.

Source File Description

All source files are provided as text files coded in VHDL. The following table gives a brief description of each file.

Source file	Description
sin_x.vhd	Quarter-wave SIN function
sincos_x.vhd	Top-level block
sincos_x_bench.vhd	Top-level test bench

Functional Testing

An example VHDL testbench is provided for use in a suitable VHDL simulator. The compilation order of the source code is as follows:

1. sin_x.vhd
2. sincos_x.vhd
3. sincos_x_bench.vhd

The simulation must be run for at least 3 ms during which time an 18-bit input stimulus in the range 0 to 262143 will be generated. The test terminates automatically.

The simulation generates two text files called *sincos_x_in.txt* and *sincos_x_out.txt*. These files contain the input and output samples captured during the course of the test. The results of the test are shown graphically in Figure 3 below:

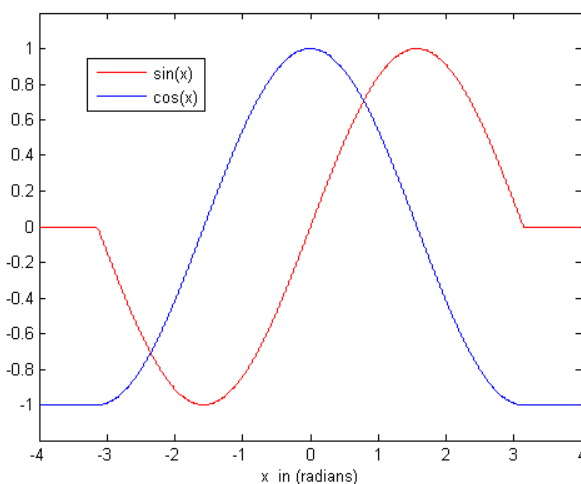


Figure 3: Plot of test results for sincos_x function

Note the valid input range from $-\pi$ to π . Values outside this range default to 0 for $\sin(x)$ and -1 for $\cos(x)$.

Synthesis

The source files required for synthesis and the design hierarchy is shown below:

- sincos_x.vhd
 - sin_x.vhd

The VHDL core is designed to be technology independent. However, as a benchmark, synthesis results have been provided for the Xilinx Virtex 5 and the Altera Stratix III series of FPGA devices. The lowest and highest speed grade devices have been chosen in both cases for comparison.

Resource usage is specified after Place and Route.

VIRTEX 5

Resource type	Quantity used
Slice register	138
Slice LUT	436
Block RAM	0
DSP48	6
Clock frequency (worst case)	104 MHz
Clock frequency (best case)	144 MHz

STRATIX III

Resource type	Quantity used
Register	234
ALUT	346
Block Memory bit	0
DSP block 18	12
Clock frequency (worse case)	139 MHz
Clock frequency (best case)	183 MHz

Revision History

Revision	Change description	Date
1.0	Initial revision	04/05/09